

Superreel® - Industrial Reel

AMSH1100D SERIES




FEATURES

- Heavy-duty. All-steel construction.
- Full flow shaft and swivel
- Rugged construction: Steel drum and all bolted construction. Vibration-proof self-locking fasteners.
- Safe: adjustable spool rotation drag eliminates hose backlash when de-reeling. Lock pin prevents spool rotation when reel is not in use.
- Versatile: Reel can be easily converted to power-driven type with motor mounting at either end of reel.
- Low maintenance: Dual main bearings never need lubrication.
- Shipped completely assembled, ready to install.



Superreel® - Industrial Reel

DIMENSIONS

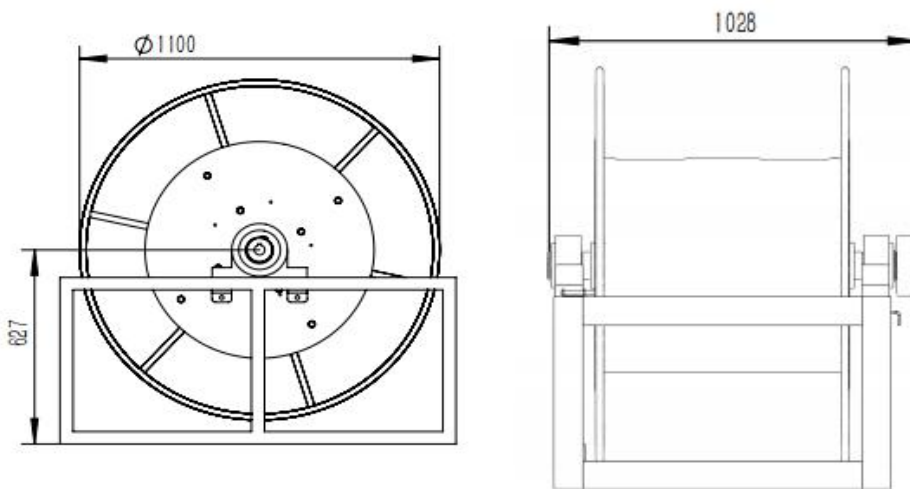

P/N	Port&core number	HOSE-ID. or CABLE-square	Pressure or lmax	Working length	Reel inlet	Hose outlet	A	B	C	D	E	F	G	H	I	J	K
AMSH1100D0110016060	1	2"	1.6Mpa	60m	BSPT2".F	BSPT2".M	1100	600	1177	1028	1210	935	1210	855	860	4	24
AMSH1100D0111016050	1	2-1/2"	1.6Mpa	50m	BSPT2-1/2".F	BSPT2-1/2".F	1100	600	1177	1028	1210	935	1210	855	860	4	24
AMSH1100D0112016040	1	3"	1.6Mpa	40m	BSPT3".F	BSPT3".F	1100	600	1177	1028	1210	935	1210	855	860	4	24
							Dimensions are in millimeters										

