

Superreel® - Industrial Reel

ESSC500D SERIES





FEATURES

- To handle live electric cable/cord.
- Professional grade heavy duty steel construction. High Power.
- Silver alloy slip ring.
- Reel drive springs manufactured from high-quality, scaleless blue tempered steel.
- Durable abrasion and corrosion resistant baked-on power coat finish.
- Adjustable bumper stop allow any desired length of cord or cable to be maintained outside the reel.
- Automatic spring retraction for quick cord rewind.
- Compact for critical space requirements.



Superreel® - Industrial Reel

DIMENSIONS

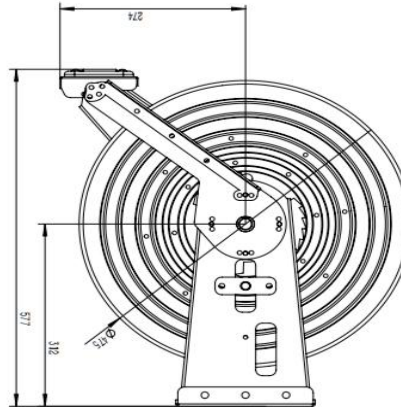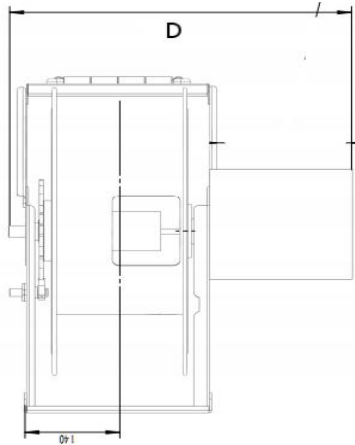

P/N	Port&core number	HOSE-ID. or CABLE-square	Pressure or Imax	Working Lengh	Reel inlet	Cable outlet	A	B	C	D	E	F	G	H	I	J	K
ESSC500D0405010020	4	1.5 ²	10A	20m	Bare wire	Bare wire	475	270	577	348	535	206	275	152	152	4	11
ESSC500D0406020020	4	2.5 ²	20A	20m	Bare wire	Bare wire	475	270	577	348	535	206	275	152	152	4	11
ESSC500D0408030020	4	4 ²	30A	20m	Bare wire	Bare wire	475	270	577	348	535	206	275	152	152	4	11
ESSC500D0409050020	4	6 ²	50A	20m	Bare wire	Bare wire	475	270	577	348	535	206	275	152	152	4	11
ESSC500D0410065015	4	10 ²	65A	15m	Bare wire	Bare wire	475	270	577	348	535	206	275	152	152	4	11
ESSC500D2005010020	20	1.5 ²	10A	20m	Bare wire	Bare wire	475	270	577	505	535	206	275	152	152	4	11
ESSC500D0114500020	1	50 ²	500A	20m	Bare wire	Bare wire	475	270	577	505	535	206	275	152	152	4	11
							Dimensions are in millimeters										

