

# Superreel® - Industrial Reel

## ASSC680D SERIES



## FEATURES

- To handle live electric cable/cord.
- Professional grade heavy duty steel construction.
- Silver alloy slip ring.
- Reel drive springs manufactured from high-quality, scaleless blue tempered steel.
- Durable abrasion and corrosion resistant baked-on power coat finish.
- Adjustable bumper stop allow any desired length of cord or cable to be maintained outside the reel.
- Automatic spring retraction for quick cord rewind.
- Compact for critical space requirements.

1




**WWW.SUPERREEL.COM**

Email: [sales@superreel.com](mailto:sales@superreel.com)

# Superreel® - Industrial Reel

## DIMENSIONS

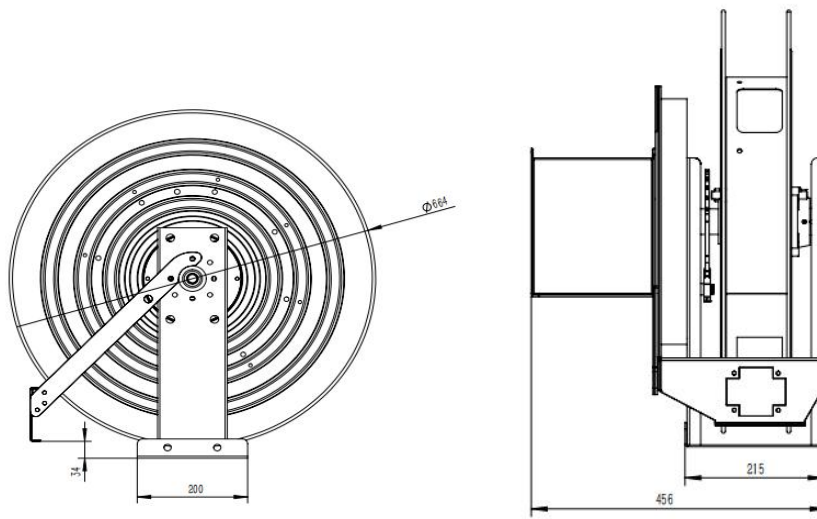

P/N	Port&core number	HOSE-ID. or CABLE-square	Pressure or lmax	Working length	Reel inlet	Cable outlet	A	B	C	D	E	F	G	H	I	J	K
ASSC680D0405010050	4	1.5 <sup>2</sup>	10A	50m	Bare wire	Bare wire	664	450	715	270	660	307	200	260	160	4	15
ASSC680D0406020050	4	2.5 <sup>2</sup>	20A	50m	Bare wire	Bare wire	664	450	715	270	660	307	200	260	160	4	15
ASSC680D0408030040	4	4 <sup>2</sup>	30A	40m	Bare wire	Bare wire	664	450	715	270	660	307	200	260	160	4	15
ASSC680D0409050030	4	6 <sup>2</sup>	50A	30m	Bare wire	Bare wire	664	450	715	458	660	307	200	260	160	4	15
							Dimensions are in millimeters										

